


# MODUL SURYA 2X100WP

- MODEL : POLLYCRISTALLINE
- OUTPUT POWER (P<sub>MAX</sub>) : 100WP 3%
- MAX POWER VOLTAGE(V<sub>PM</sub>) : 17.5 V
- MAX POWER CURENT(I<sub>PM</sub>) : 3.0 A
- OPEN CIRCUIT VOLTAGE(V<sub>OC</sub>) : 22.2 V
- SHORT CIRCUIT CURENT(I<sub>SC</sub>) : 3.3 A
- Number of cells : 40-50 cells
- SIZE FRAME : 120x54x4 Cm



# BCR 12V-20A PWM

- ARUS KELUARAN MAX : 20A
- ARUS MASUK MAX : 6A
- TEGANGAN KELUARAN : 12 VOLT
- KONSUMSI DAYA : 20MA (STANDY)
- HVD : 14.5 V
- LVD : 11,2 V
- PROTEKSI BEBAN LEBIH : Ya
- CONTROLER LAMPU : SUN SWITCH/TIMER CONTROL

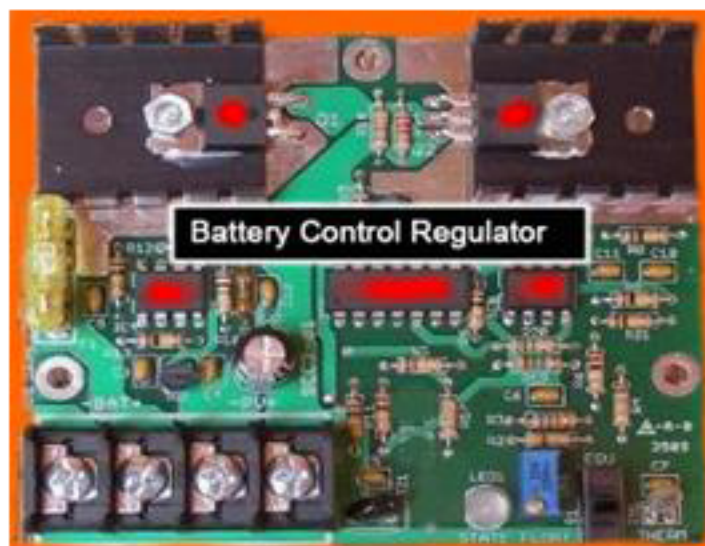

PT. Trijaya Santika Bhakti

# LAMPU LED-50

- MODEL : LED 50
- LED POWER : 50 W
- TYPE : ULTRA BRIGHT LED
- VOLTAGE : DC (12V)
- POWER EFFICIENCY : > 0.9
- LED LUMINOUS EFFICIENCY : 100LM/W/ 130LM/W
- EFFICIENCY OF THE LIGHT : > 90%
- LIGHT COLOR : LIGHT WARM
- COLOR TEMPERATURE WARM : 2700K - 7000K
- WORKING ENVIRONMENT : - 40C - 55C
- PROTECTION GRADE : IP65
- LIFE SPAN : >50.000 H
- WEIGHT : 2,5 KG
- DIMENSION : 530MM X 242MM X 142MM



# BATTERY

- KAPASITAS : 100AH-MF/DEEP CYCLE
- TEGANGAN : 12V-DC
- CYCLE LIFE : 400 CYCLE
- CELL : 6 CELLS
- LENGTH : 30.48 CM
- WIDTH : 16.76 CM
- HEIGHT : 22.81 CM
- WEIGHT : 30.39 KG
- CADANGAN WAKTU : 2 HARI



KABEL NYYHY 1.5x2  
KABEL NYYHY 2.5x2


NUMBER OF CORE : 2  
CONDUCTOR NOMINAL : 2.5 Sqmm  
CURRENT CARRYING : 25 A

# KABEL



PT. Trijaya Santika Bhakti

# KOMPONEN TIANG PJU

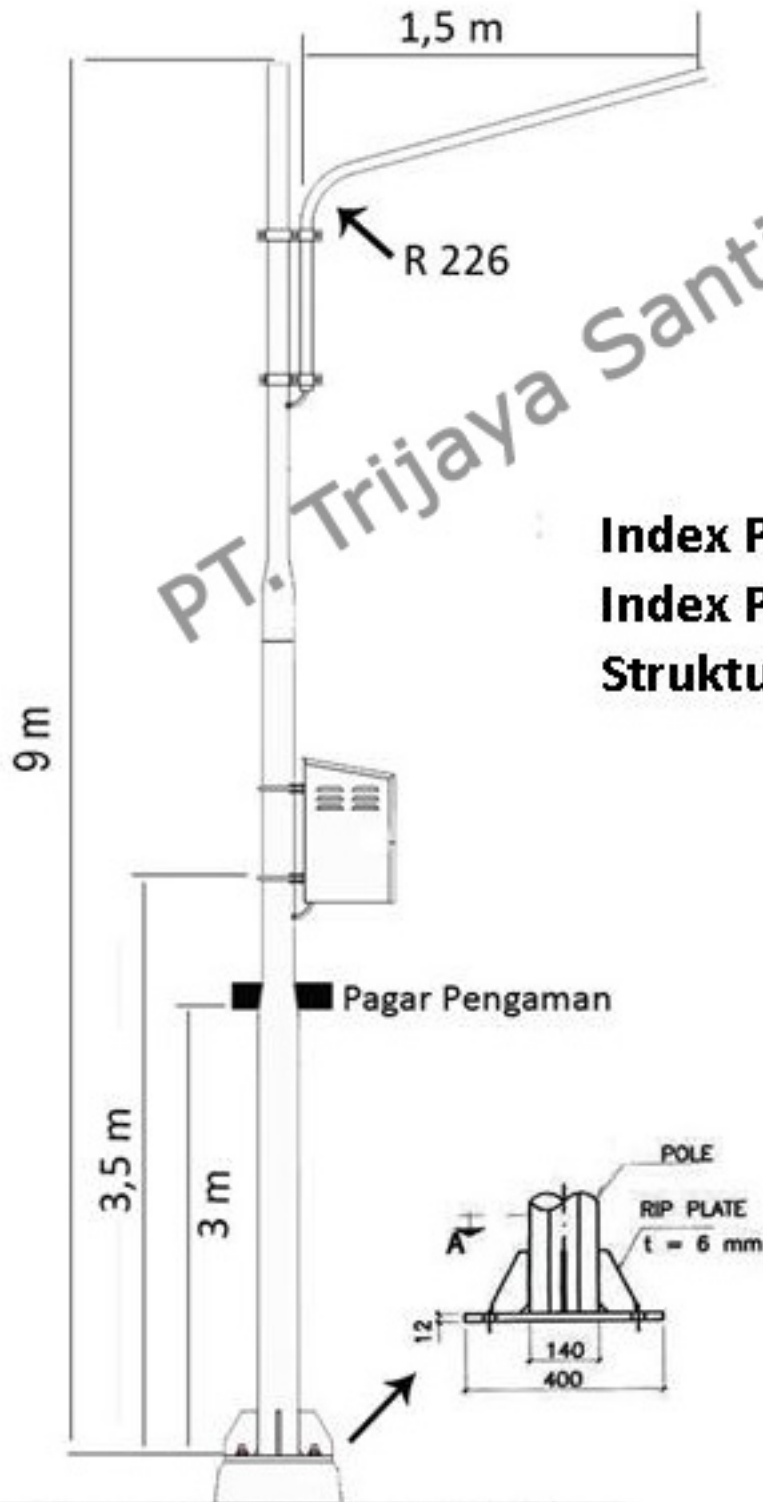

Index Proteksi Ruang Lampu : IP 65

Index Proteksi Ruang Kontroler : IP 65

Struktur Tiang : Besi Plat Galvanized

PT. Trijaya Santika Bhakti

# BOX BATTERY & BCR



UKURAN : P x L x T = 50 x 25 x 50 Cm

BAHAN : Besi 1.5 mm - Finising Powder Coutting

PENGAMAN : Kunci